

Warranty card

Product name	User name and address		
Purchase date	date	Distribution unit (Gai Zhang)	
Production code			
<p>This product implementation of the "three packs", such as failure of the user can not be ruled out, you can contact our factory or the local maintenance department to resolve, in the after-sales maintenance free of charge within six months.</p> <p>Frist The user must fill in the purchase is the warranty card, and executed by the dealer unit signature, after the use of the card number service.</p> <p>Two Where the use of the provisions of the provisions of the wiring, improper use, transport and other damage caused by the need to replace parts of the product, the factory only to recover parts costs.</p> <p>Three shall be my factory "three bags" maintenance, please contact me with a letter or telephone factory, and explain the number of products, and damage.</p>			

Warming Showcase

NB-RGG1

NB-RGG2

NB-RGG3

Product specification

Warning: Product use must comply with the instruction manual, if there is any violation of operation, there is an accident, the factory is not responsible.

The product must be used before safety grounding

It is strictly prohibited to use water spray pipe for washing!

This factory product design novel and unique, beautiful shape, arc shape, two layers of display, surrounded by transparent glass, with optional temperature, temperature display, temperature uniformity, and a humidity compensation and keep the food's performance

Thermal insulation, moisture.

the main technical parameters


model	voltage V	Frequency Hz	Power KW	Outline dimension mm
NB-RGG1	220	50	0.65	342*382*510
NB-RGG2	220	50	0.65	342*406*412
NB-RGG2	220	50	0.65	500*380*465

installation operation method:

- 1、 the product must be safely grounded before use!
- 2、 The voltage must be in conformity with the rated voltage before
- 3、 In each time before turning on the power supply of the water basin of water.
- 4、 switch on the power, the power indicator light, rotating heating switch, choose the food temperature, can make the space temperature rise, by natural convection, can keep the temperature of each layer.
- 5、 In the use process, such as the need for lighting, can open the lighting switch, can make the operation more convenient, better display effect, at the same time can open the top decorative lights, can increase the display effect.

- 6、 the use of finished, when cleaning, in order to prevent accidents: the power must be cut off.
- 7、 In the use of the process, such as abnormal phenomenon, should stop using, please troubleshooting, can continue to use.

- Four transportation and storage:
In the process of transportation, should prevent vibration, collision, inversion, extrusion, water and non
- Five cleaning and maintenance
Use is completed, with the use of non corrosive cleaning agent, wipe clean thermal insulation cabinet.
The paint has prohibited the use of dissolved liquid to
- Six electrical schematic

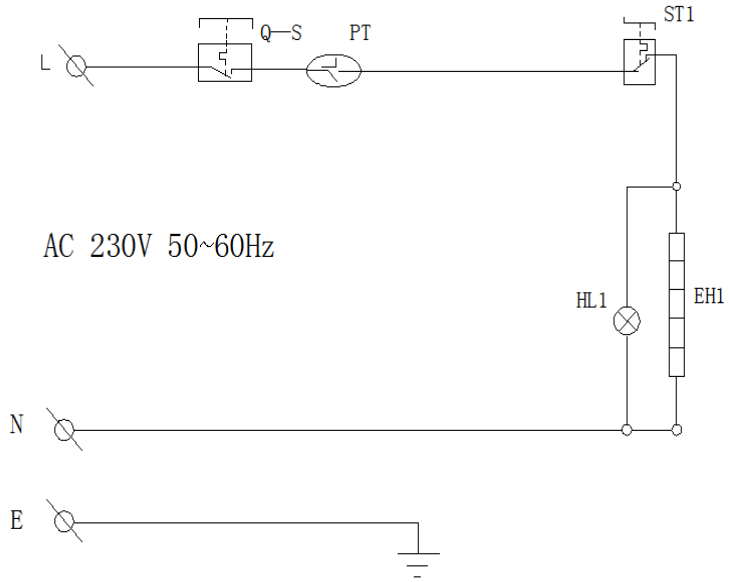

ST1 — The thermostat HL1 — Indicator light
 Q-S — Limit the warm EH1 — Electric heat pipe
 PT — switch

One

Two

Three