


VEVOR®

CAR POLISHER
User Manual

VEVOR[®]

AUTO - DARKENING WELDING HELMET *User Manual*

Model: R7171-150

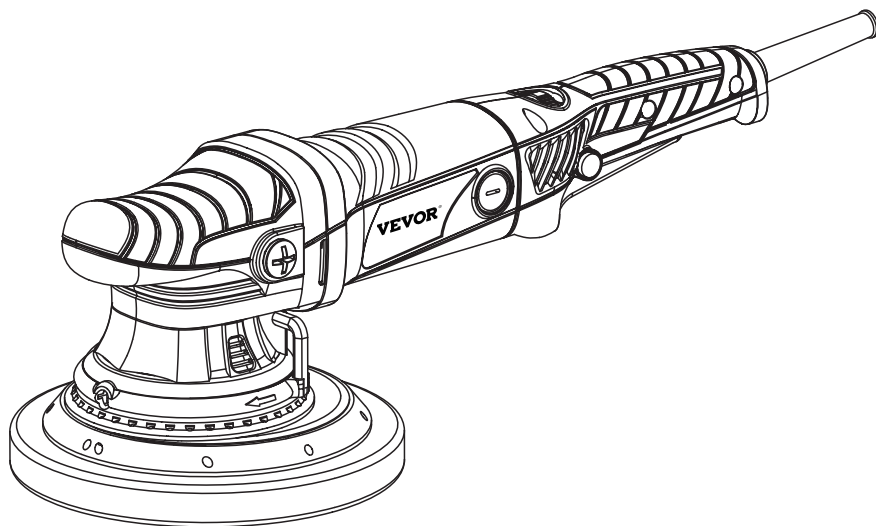

NEED HELP? CONTACT US!


Have product questions? Need technical support? Please feel free to contact us:



CustomerService@vevor.com

This is the original instruction, please read all manual instructions carefully before operating. VEVOR reserves clear interpretation of our user manual. The appearance of the product shall be subject to the product you received. Please forgive us that we won't inform you again if there is any technology or software updates on our product.

TECHNICAL SPECIFICATIONS

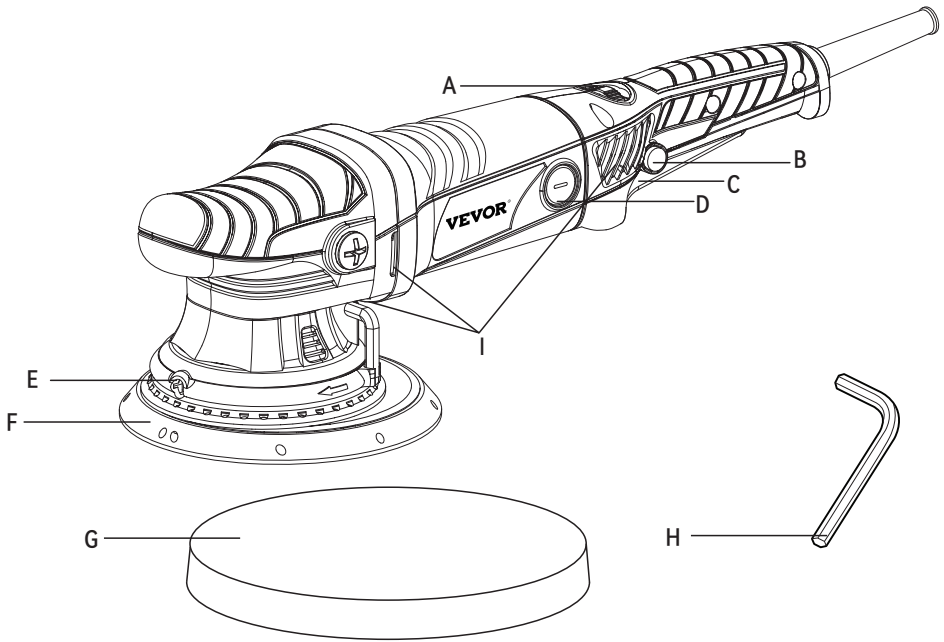

A. Speed Regulator

C. On/Off Switch

E. Hole For Balance Adjustment

G. Sponge Pad

I. Ventilation Slots


B. Knob For Locking On/off Switch

D. Cover Of Brush Holder

F. Polishing Disk

H. Hex Spanner S6

TECHNICAL SPECIFICATIONS

Model Number	R7171-150
Voltage	120V~, 60Hz
Rated Current	7A
No-load Speed	2100-5000/min
Dia. Φ Max	6inch
Protection Class	II 

SAFETY

General Safety Instructions



WARNING! Read all safety warnings and all instructions. Failure to follow the warnings and instructions may result in electric shock, fire and/or serious injury. Save all warnings and instructions for future reference. The term “power tool” in the warnings refers to your mainsoperated (corded) power tool or battery-operated (cordless) power tool.

1. Work Area Safety

- Keep work area clean and well lit . Cluttered or dark areas invite accidents.
- Do not operate power tools in explosive atmospheres, such as in the presence of flammable liquids, Gases or dust . Power tools create sparks which may ignite dust or fumes.
- Keep children and bystanders away while operating a power tool . Distractions can cause you to lose control.

2. Electrical Safety

- Power tool plugs must match the outlet. Never modify the plug in any way. Do not use any adapter plugs with earthed (grounded) power tools. Unmodified plugs and matching outlets will reduce risk of electric shock.
- Avoid body contact with earthed or grounded surfaces such as pipes, radiators, ranges, and refrigerators. There is an increased risk of electric shock if your body is earthed or grounded.
- Do not expose power tools to rain or wet conditions. Water entering a power tool will increase the risk of electric shock.
- Do not abuse the cord. Never use the cord for carrying, pulling or unplugging the power tool. Keep cord away from heat, oil, sharp edges, or moving parts. Damaged or entangled cords increase the risk of electric shock.
- When operating a power tool outdoors, use an extension cord suitable for outdoor use. Using wires suitable for outdoor use can reduce the risk of electric shock.
- If operating a power tool in a damp location is unavoidable, use an earth leakage circuit breaker. Use of an earth leakage circuit breaker reduces the risk of electric shock.

3. Personal Safety

- Stay alert, watch what you are doing and use common sense when operating a power tool. Do not use a power tool while you are tired or under the influence of drugs, alcohol, or medication. A moment of inattention while operating power tools may result in serious personal injury.
- Use personal protective equipment. Always wear eye protection. Protective equipment such as dust mask, non-skid safety shoes, hard hat, or hearing protection used for appropriate conditions will reduce personal injuries.
- Prevent unintentional starting. Ensure the switch is in the off-position before connecting to power source and/or battery pack, picking up or carrying the tool. Carrying power tools with your finger on the switch or energising power tools that have the switch on invites accidents.

- Remove any adjusting key or wrench before turning the power tool on. A wrench or a key left attached to a rotating part of the power tool may result in personal injury.
- Do not overreach. Keep proper footing and balance at all times. This enables better control of the power tool in unexpected situations.
- Dress properly. Do not wear loose clothing or jewelry. Keep your hair, clothing and gloves away from moving parts. Loose clothes, jewelry or long hair can be caught in moving parts.
- If devices are provided for the connection of dust extraction and collection facilities, ensure these are connected and properly used. Use of dust collection can reduce dust-related hazards.

4. Power Tool Use And Care

- Do not force the power tool. Use the correct power tool for your application. The correct power tool will do the job better and safer at the rate for which it was designed.
- Do not use the power tool if the switch does not turn it on and off. Any power tool that cannot be controlled with the switch is dangerous and must be repaired.
- Disconnect the plug from the power source and/or the battery pack from the power tool before making any adjustments, changing accessories, or storing power tools. Such preventive safety measures reduce the risk of starting the power tool accidentally.
- Store idle power tools out of the reach of children and do not allow persons unfamiliar with the power tool or these instructions to operate the power tool. Power tools are dangerous in the hands of untrained users.
- Maintain power tools. Check for misalignment or binding of moving parts, breakage of parts and any other condition that may affect the power tool's operation. If damaged, have the power tool repaired before use. Many accidents are caused by poorly maintained power tools.
- Keep cutting tools sharp and clean. Properly maintained cutting tools with sharp cutting edges are less likely to bind and are easier to control.
- Use the power tool, accessories and tool bits etc., in accordance with these instructions, taking into account the working conditions and the work to be performed. The use of the power tool for operations different from those intended could result in a hazardous situation.

5. Service

- Have your power tool serviced by a qualified repair person using only identical replacement parts. This will ensure that the safety of the power tool is maintained.

SAFETY INSTRUCTIONS FOR POLISHERS

1. Safety Instructions For All Operations

- a. This power tool is intended to function as a polisher. Read all safety warnings, instructions, illustrations and specifications provided with this power tool. Failure to follow all instructions listed below may result in electric shock, fire and/or serious injury.
- b. This power tool is not recommended for grinding, sanding, wire brushing, or cutting-off operations. Operations for which the power tool was not designed may create a hazard and cause personal injury.

- c. Do not allow any loose portion of the polishing bonnet or its attachment strings to spin freely. Tuck away or trim any loose attachment strings. Loose and spinning attachment strings can entangle your fingers or snag on the workpiece.
- d. Do not use accessories which are not specifically designed and recommended by the tool manufacturer. Just because the accessory can be attached to your power tool, it does not assure safe operation.
- e. The rated speed of the accessory must be at least equal to the maximum speed marked on the power tool. Accessories running faster than their rated speed will fly apart.
- f. The outside diameter and the thickness of your accessory must be within the capacity rating of your power tool. Incorrectly sized accessories cannot be adequately guarded or controlled.
- g. The arbour size of wheels, flanges, backing pads or any other accessory must properly fit the spindle of the power tool. Accessories with arbour holes that do not match the mounting hardware of the power tool will run out of balance, vibrate excessively and may cause loss of control.
- h. Do not use a damaged accessory. Check accessories before each use, such as abrasive wheels for chips and cracks, backing pads for cracks, tear or excess wear, wire brushes for loose or cracked wires. If the power tool or accessory is dropped, inspect for damage or install an undamaged accessory. After inspecting and installing an accessory, position yourself and bystanders away from the plane of the rotating accessory and run the power tool at maximum no load speed for one minute. Damaged accessories will normally break apart during this test time.
- i. Wear personal protective equipment. Use a mask, goggles, or safety glasses, depending on the application. When appropriate, wear a dust mask, hearing protectors, gloves and shop apron capable of stopping small abrasive or workpiece fragments. The eye protection must be capable of stopping flying debris generated by various operations. The dust mask or respirator must be capable of filtering particles generated by your operation. Prolonged exposure to high intensity noise may cause hearing loss.
- j. Keep bystanders at a safe distance away from work area. Anyone entering the work area must wear personal protective equipment. Fragments of work pieces or broken accessories may fly away and cause injury beyond the immediate operating area.
- k. Position the cord clear of the spinning accessory. If you lose control, the cord may be cut or snagged, and your hand or arm may be pulled into the spinning accessory.
- l. Do not put down the power tool until the attachment has stopped completely. The spinning accessory may grab the surface and pull the power tool out of your control.
- m. Do not run the power tool while carrying it at your side. Accidental contact with the spinning accessory could snag your clothing, pulling the accessory into your body.
- n. Clean the power tool vents regularly. The fan of the motor can suck dust into the housing, and excessive accumulation of powdered metal can cause an electrical hazard.
- o. Do not operate the power tool near flammable materials. Sparks could ignite these materials.
- p. Do not use accessories that require liquid coolants. Using water or other liquid coolants may result in electrocution or shock.

2. Kickback And Related Warnings

- Kickback is a sudden reaction to a pinched or snagged rotating wheel, backing pad, brush or any other accessory. Pinching or snagging causes rapid stalling of the rotating accessory which in turn causes the uncontrolled power tool to be forced in the direction opposite of the accessory's rotation at the point of the binding.

- For example, if an abrasive wheel is snagged or pinched by the workpiece, the edge of the wheel that is entering into the pinch point can dig into the surface of the material causing the wheel to climb out or kick out. The wheel may either jump toward or away from the operator, depending on the direction of the wheel's movement at the point of pinching. Abrasive wheels may also break under these conditions.
 - Kickback is the result of power tool misuse and/or incorrect operating procedures or conditions and can be avoided by taking proper precautions as given below.
- a. Maintain a firm grip on the power tool and position your body and arm to allow you to resist kickback forces. Always use an auxiliary handle, if provided, for maximum control over kickback or torque reaction during start-up. The operator can control torque reactions or kickback forces, if proper precautions are taken.
 - b. Never place your hand near the rotating accessory. The accessory may kickback over your hand.
 - c. Do not position your body in the area where power tool will move if kickback occurs. Kickback will propel the tool in the direction opposite to the wheel's movement at the point of snagging.
 - d. Use special care when working corners, sharp edges etc. Avoid bouncing and snagging the accessory. Corners, sharp edges or bouncing have a tendency to snag the rotating accessory and cause loss of control or kickback.
 - e. Do not attach a sawchain woodcarving saw blade or tooth saw blade. Such blades can cause frequent kickbacks and loss of control.

General

- Only use this tool for dry polishing.
- Only use the flanges which are supplied with this tool.
- This tool should not be used by people under the age of 16 years.
- Always disconnect plug from power source before making any adjustment or changing any accessory.
- Do not work materials containing asbestos (asbestos is considered carcinogenic) ACCESSORIES.
- Use only accessories with an allowable speed matching at least the highest no-load speed of the tool.
- Never use accessories with a "blind" threaded hole smaller than M14 x 21 mm.
- Do not use damaged, deformed or vibrating accessories.

Outdoor Use

- When used outdoors, connect the tool via a fault current (FI) circuit breaker with a triggering current of 30 mA maximum, and only use an extension cord which is intended for outdoor use and equipped with a splashproof coupling socket.

Before Use

- Always check that the supply voltage is the same as the voltage indicated on the nameplate of the tool.
- Dust from material such as paint containing lead, some wood species, minerals and metal may be harmful (contact with or inhalation of the dust may cause allergic reactions and/or respiratory diseases to the operator or bystanders); wear a dust mask and work with a dust extraction device when connectable.

- Certain kinds of dust are classified as carcinogenic (such as oak and beech dust) , especially in conjunction with additives for wood conditioning; wear a dust mask and work with a dust extraction device when connectable.
- Follow the dust-related national requirements for the materials you want to work with.
- Secure the workpiece (a workpiece clamped with clamping devices or in a vice is held more securely than by hand).
- Do not clamp the tool in a vice.
- Use completely unrolled and safe extension cords with a capacity of 10 Amps.

After Use

- Before you put down the tool, switch off the motor and ensure that all moving parts have come to a complete standstill.
- After switching off the tool, never stop the rotation of the accessory by a lateral force applied against it.

Use

- Mounting of accessories
! disconnect the plug
 - simply press sponge pad G onto VELCRO polishing disk F
 - for removing accessories handle vice-versa
- Before using the tool
 - ensure that accessory is correctly mounted and firmly tightened
 - check if accessory runs freely by turning it by hand
 - test-run tool for at least 30 seconds at highest no-load speed in a safe position
 - stop immediately in case of considerable vibration or other defects and check tool to determine the cause
- On/off
 - switch on/off the tool by pulling/releasing trigger C
- Electronic soft-start
 Ensures reaching the maximum speed smoothly without a sudden impact when tool is switched on
- Switch locking for continuous use
 - pull trigger C
 - press knob B with your thumb
 - unlock the switch by pulling again trigger C and then releasing it
- Speed control
 - with wheel A the maximum speed can be adjusted from low to high (MIN-6)
 - start with wheel A in position MIN (lower speed)
 - if needed, select a higher speed while the tool runs
 - the optimal working speed depends on the material and can be determined with practical trials
- Operating the tool
! switch on the tool first, then place the tool fully on the surface to be polished and move it evenly by sections
! before switching off the tool, you should lift it from the workpiece
! the accessory continues to rotate for a short time after the tool has been switched off

- Holding and guiding the tool
! while working, always hold the tool at the soft grip area(s)
- always hold the tool firmly with both hands, so you will have full control of the tool at all times
- provide for a secure stance
! do not apply so much pressure on the tool that it comes to a standstill
- keep ventilation slots I uncovered

Maintenance / Service

- Protect the tool from impact, shock and grease
- Always keep tool and cord clean (especially ventilation slots I)
! disconnect the plug before cleaning
! do not attempt to clean ventilation slots by inserting pointed objects through openings

Environment

- Do not dispose of electric tools, accessories and packaging together with household waste material (only for EU countries)- in observance of the European Directive on the waste of electric and electronic equipment and its implementation in accordance with national law, electric tools that have reached the end of their life must be collected separately and returned to an environmentally compatible recycling facility



Lock / to tighten or secure.



Lock / to tighten or secure.



Note / Remark.



Caution / Warning.



Read the instruction manual.



Wear hearing protection.



Wear eye protection.



Wear a dust mask.



Wear protective gloves.



Wear protective, slip- resistant footwear.



Switch the product off and disconnect it from the power supply before assembly, cleaning, adjustments, maintenance, storage and transportation.



This product is of protection class II. That means it is equipped with enhanced or double insulation.



WEEE symbol. Waste electrical products should not be disposed of with household waste. Please recycle where facilities exist. Check with your Local Authority or local store for recycling advice.

Manufacturer: Zhejiang Burley Tools Co.,LTD

Address: South-eastern IndustrialZone, Shuxi Street, Wuyi County , Zhejiang, China

VEVOR[®]

E-mail: CustomerService@vevor.com