

VEVOR[®]

TOUGH TOOLS, HALF PRICE

Technical Support and E-Warranty Certificate www.vevor.com/support

CAR REFRIGERATOR USER MANUAL

MODEL: T35K T45K T55K


We continue to be committed to provide you tools with competitive price.

"Save Half", "Half Price" or any other similar expressions used by us only represents an estimate of savings you might benefit from buying certain tools with us compared to the major top brands and does not necessarily mean to cover all categories of tools offered by us. You are kindly reminded to verify carefully when you are placing an order with us if you are actually saving half in comparison with the top major brands.

VEVOR[®]

Car Refrigerator

T35K T45K T55K

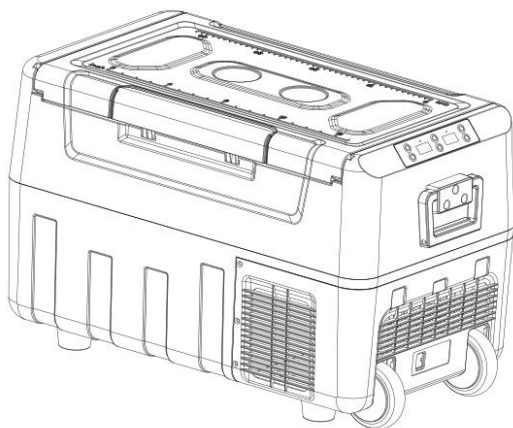

<Picture Only For Reference >

NEED HELP? CONTACT US!

Have product questions? Need technical support? Please feel free to contact us:



CustomerService@vevor.com

This is the original instruction, please read all manual instructions carefully before operating. VEVOR reserves a clear interpretation of our user manual. The appearance of the product shall be subject to the product you received. Please forgive us that we won't inform you again if there are any technology or software updates on our product.



This product is subject to the provision of European Directive 2012/19/EU. The symbol showing a wheeled bin crossed through indicates that the product requires separate refuse collection in the European Union. This applies to the product and all accessories marked with this symbol. Products marked as such may not be discarded with normal domestic waste, but must be taken to a collection point for recycling electrical and electronic devices.

Attentions

Before using the refrigerator, please read this manual carefully and keep it properly.

1. Before using the refrigerator, clean it inside and outside with a damp cloth.
2. Do not fill the refrigerator with corrosive liquids. Do not directly pour liquids into the refrigerator.
3. When the refrigerator is not used for a long time, please disconnect the power supply and keep it dry.
4. Regularly clean the inner chamber to prevent odor and bacteria and ensure food safety.
5. This manual applies to T35K/T45K /T55K refrigerators (American and European markets).

Connect the Power Supply

1. Find the DC power cord in the kit. Connect DC plug to the power outlet of the

car refrigerator.

2.Well place the refrigerators in the car (back-up, seats....).

3.Lay out power cords per your car's interior space. Then, insert the cigarette lighter plug (one side of the power cord) into the car cigarette lighter hole.

4.Press "ON/OFF" for 3 seconds, and the car refrigerator can be turned on.



Adapter Connect the car cigarette lighter Connect the car refrigerator

The product can be connected to more than one power supply.

The onboard refrigerator is directly connected to the DC12V/24V DC power supply.

The car refrigerator equipped with an AC100-240V AC adapter can be used at home with a voltage of AC100-240V.

Instructions

Car battery protection voltage reference:

Built-in ECO electronic control module can automatically monitor the vehicle battery voltage. Before the power consumption affects the standard ignition of the vehicle, the onboard refrigerator will automatically disconnect the power supply to ensure that the vehicle battery power will not be too low to affect the standard ignition of the vehicle.


Battery Voltage	Factory default voltage protection value H		
	H (high) level	M (medium) level	L (low) level
DC12V	DC11.3V OFF	DC10.1V OFF	DC9.6V OFF
	DC12.5V ON	DC11.4V ON	DC10.9V ON


DC24V	DC24.6V OFF	DC22.3V OFF	DC21.3V OFF
	DC26.0V ON	DC23.7V ON	DC22.7V ON

Note: When the power supply is connected and the refrigerator is turned on, disconnecting or starting refers to disconnecting or starting the compressor.

Component Diagram

1. Cabinet
2. Classified plate
3. Case Cover
4. Door buckle
5. Sealing Strip
6. Control panel
7. Handle (optional)
8. Wheel (optional)
9. Power Interface

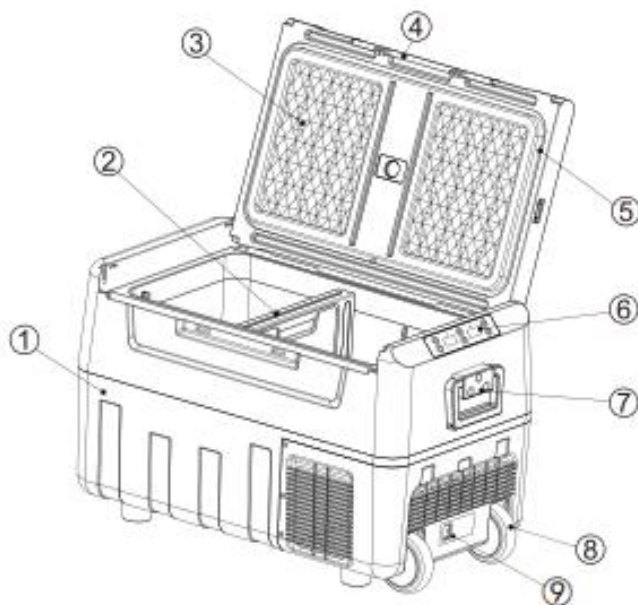

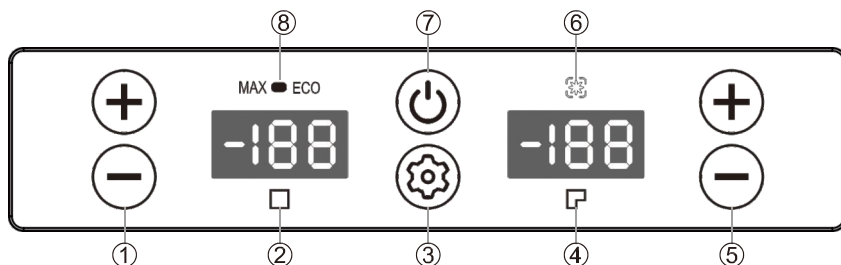

①Setting for large compartment ②large compartment ③Setting button
④Small compartment ⑤Setting for small compartment ⑥Cooling
indicator ⑦ON/OFF button ⑧ Max/Eco

△Function Introduction

After power-on, the digital display screen will be fully lit for 1 second and displayed normally. The default is the last memory function. The display screen temperature figure will be permanently lit in the middle in standby mode.

1. Open and Close

After the power is turned on, the refrigerator will be in standby mode.

Now, press the ON/OFF button to open the refrigerator. After the refrigerator is opened, the display will show the current temperature of the storage room. It will start running.

Warning: The displayed temperature is only the temperature around the sensor. The temperature of different points in the storage room is different.

Therefore, this is normal if the displayed temperature differs from the measured temperature.


Press the ON/OFF button when the refrigerator is running, and the refrigerator will return to standby.

2. Temperature Setting

1) Switch on the fridge, press \oplus to raise the set temperature and \ominus to reduce the storage compartment's temperature. Each press will change by 1 °C, and the maximum can be set to 10 °C, and the minimum can be set to - 20 °C. Please note the clipboard shall be located in the correct position before the set temperature of the large compartment.

- 2) If the clapboard is removed from the compartment, the temperature display of the small compartment will be off. In this condition, there is only one storage compartment.
- 3) The temperature display will flash for 3 seconds and then fix the setting after adjusting the temperature and no more action on buttons. The setting temperature will be memorized, and the display will turn back to show the actual temperature of the storage compartment.
- 4) The default value for an initial startup is 0 °C/32 °F.

3.MAX / ECO Mode Conversion

Directly press  key to switch to MAX mode or ECO mode.


MAX running mode: the fridge will work hard to reduce temperature fast.

ECO running model: the fridge will work longer to reduce the temperature to save energy.

4.Celsius (° C)/Fahrenheit (° F) display switching

Press and hold the "+" key and the setting key on the left (large box) for over 3 seconds to switch.

5.Battery Protection Levels: H1 (High) N2 (Low) L3 (Medium)

Press  key for 3s to enter the battery protection setting. Press the key again to switch H1 N2 L3 levels in turns.

If no operations were detected, the set level will flash for 3s, then exit and save the current setting.

Model Parameter Table:

Model No.	Capacity	Voltage	AC Power	DC Power	Temperature Adjustable	Plug type
T35K	35L	AC100~240V (50/60Hz) DC12V/24V	Cooling : 60W	Cooling 60W	50~4°F	USA plug DC plug

T35K	35L	AC100~240V (50/60Hz)D C 12V/24V	Cooling : 60W	Cooling : 60W	10~- 20 °C	EU plug DC plug
T45K	45L	AC 100~240V (50/60Hz)D C 12V/24V	Cooling : 60W	Cooling : 60W	50~- 4°F	USA plug DC plug
T45K	45L	AC 100~240V (50/60Hz)D C 12V/24V	Cooling : 60W	Cooling : 60W	10~- 20 °C	EU plug DC plug
T55K	55L	AC 100~240V (50/60Hz)D C 12V/24V	Cooling : 60W	Cooling : 60W	50~- 4°F	USA plug DC plug
T55K	55L	AC 100~240V (50/60Hz)D C 12V/24V	Cooling : 60W	Cooling : 60W	10~- 20 °C	EU plug DC plug

Notice for Temperature Setting

Insert the clapboard in the correct position of the storage compartment, and then switch on the fridge. The display will show the temperature of two storage compartments. When adjusting temperature, setting the temperature of the small compartment(TS) is not able to be higher than setting the temperature of the big compartment (TL).

TS ≤ TL

For example, if the set temperature of the small compartment (TS) to -10°C (14°F), the range of setting temperature of the large compartment (TL) is from -10°C (14°F) to 10°C (50°F). Tips: use a large compartment for fresh food and a small compartment for frozen food.



Power-off Memory Function

There is a power-off memory function for car refrigerators. When the power is lost, the working state (On/Off status, working mode, etc.) before power-off can be automatically recovered at the next startup; no need to set it again.

ECO: Energy-saving cooling MAX: Powerful cooling

Use Clapboard

1. Align with two rails on inner liner.
2. Vertically push clapboard to bottom of liner.

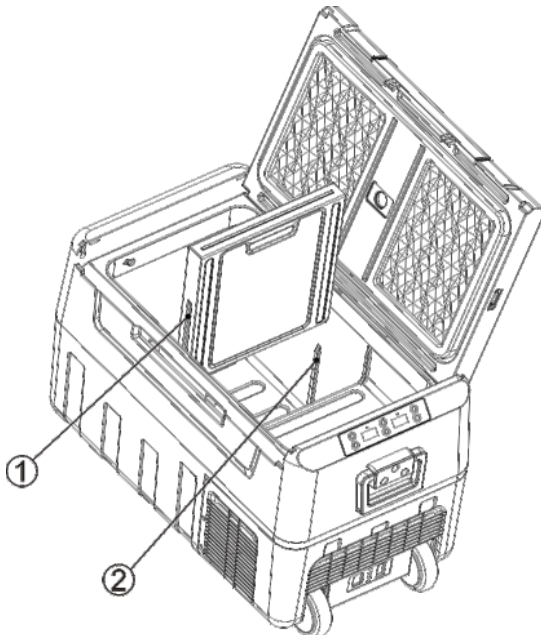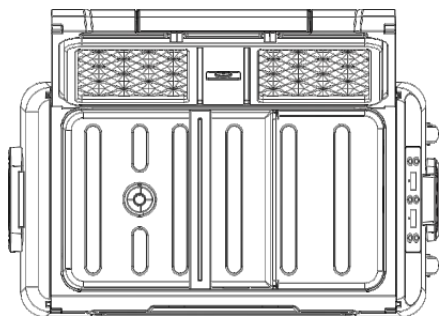

Simple Fault Analysis

Advice: If abnormal situations cannot be resolved through a simple fault analysis, please get in touch with professional customer service for assistance.

I. Car Refrigerator Does Not Work

1. Check if the power is connected correctly. (check If the plug is loosened or positive and negative poles are reversed).
2. Check if the power switch on the operation panel is turned on.
3. Check if the cooling ventilation is normal.
4. Check if the fuse is blown.

II. Poor Cooling Performance

1. Check if the lid is closed correctly.
2. Check if the door seal is damaged or deformed.
3. Check if there is poor ventilation around the fridges.
4. Check if the temperature is set correctly.

△Definition Of Error Codes On The Display

Error Code	Error Type
E1	Low Input Voltage
E2	Fan Fault
E3	Compressor start failed
E4	Low Rotational Speed of Compressor
E5	Controller module temperature too high
E6	Open or Short Circuit of NTC

III. Abnormal Noise

1. The car refrigerator needs to be placed smoothly.
2. Touch a wall or other object.
3. There are parts loose or falling off inside.

IV. Condensation on Refrigerator Surface

When the ambient air humidity exceeds 75%, slight condensation will occur on the box surface, which is normal.

Failures and Solutions

△E1: Low Input Voltage

Failure 1: Insert the refrigerator power cord into the cigarette lighter before the car starts. Solution 1: Wait a while to connect the car after it starts.

Failure 2: The input voltage of the adapter is too low.

Solution 2: Adjust the battery protection level to middle-voltage or low-voltage. If it doesn't work, please replace a new adapter.

△E2: Fan Fault

Please replace a new fan when you identify there is a fan malfunction.

△E3: Input Voltage Fault Due to Compressor Frequently Start

When the refrigerator is used in the car, and E3 appears, Please shut it down for 5 minutes and restart it.

If it doesn't work, that can be identified to be EI fault; please solve it according to the solution of EI.

When the refrigerator is connecting with the adapter and E3 appearing

- ① Please adjust the battery protection level to the middle or low level.
- ② If it doesn't work, please replace a new adapter.

△E4: Low Rotational Speed of Compressor

Please adjust the input voltage and repower it.

△E5: Overheating of Controller Chip

Please power off for 5 minutes and check if the lousy ventilation around the

compressor causes the overheating.

Use Suggestions

1. If equipped with a backup battery, you can maintain any temperature you set under any circumstances without worries.
2. When placing ice cream, please adjust the temperature to the lowest; it must be powered on for a long time.
3. Prevent the health problems of drinking bottled water caused by high temperatures.
4. Frozen food, rare seafood, and vehicle-mounted refrigerators let frozen fresh food accompany the journey.
5. Healthcare products, insulin, and imported drugs need to be refrigerated, and the precise temperature control of onboard refrigerators will escort health along the way.
6. The tea leaves are effectively kept fresh in the car refrigerator, and you can drink fresh and delicious tea anytime during the self-driving tour.
7. The best storage temperature of red wine is 10 °C - 18 °C (50 - 64.4 °F). The precise temperature control of the car refrigerator can effectively ensure the storage temperature of red wine.
8. The storage time of high-grade fruit in the car at high summer temperatures will be at least 2 hours. The storage time is shorter even if the air conditioner is turned on. Using a car refrigerator can effectively preserve high-grade fruit.
9. The coating of high-grade sunglasses will fall off under the high temperature in summer. The car refrigerator is an ideal place to place it.
10. High-grade cosmetics quickly deteriorate under high temperatures in the car. Carry cosmetics with the car; the car refrigerator will be your better choice.

Safety Precautions

- (1) Ensure that the power voltage connected to the onboard refrigerator is correct

at any time (The parameters are labeled with the approved voltage parameters of the onboard refrigerator).

(2) Do not pour liquid directly into the car refrigerator.

(3) Modifying the refrigerator without permission is forbidden to avoid danger.

(4) This appliance is not intended for use by persons (including children) with reduced physical, sensory, or mental capabilities or lack of experience and knowledge unless they have been given supervision or instruction concerning the use of the appliance by a person responsible for their safety.

(5) Children should be supervised to avoid playing with the appliance.

(6) This appliance can be used by children aged from 8 years and above and persons with reduced physical, sensory or mental capabilities or lack of experience and knowledge if they have been given supervision or instruction concerning use of the appliance in a safe way and understand the hazards involved. Children shall not play with the appliance. Cleaning and user maintenance shall not be made by children without supervision.

(7) To avoid a hazard due to the instability of the appliance, it must be fixed under the instructions.

(8) Do not store explosive substances such as aerosol cans with a flammable propellant in this appliance.

WARNING: This appliance contains flammable foaming agent cyclopentane:

1) Please avoid contact fire when you transport and use it.


2) Please ask a professional for servicing when the machine breaks down.

3) Please send it to your local appointed disposal station when you discard it.



WARNING: During use, service, and disposal of the appliance, please pay attention to a symbol similar to the left side, which is located on the rear of the appliance (rear panel or compressor) and with yellow or orange color. It's a risk of fire warning symbol. There are flammable materials in refrigerant pipes and compressors. Please be far away fire source during use, service, and disposal.

Electrical Schematic Diagram

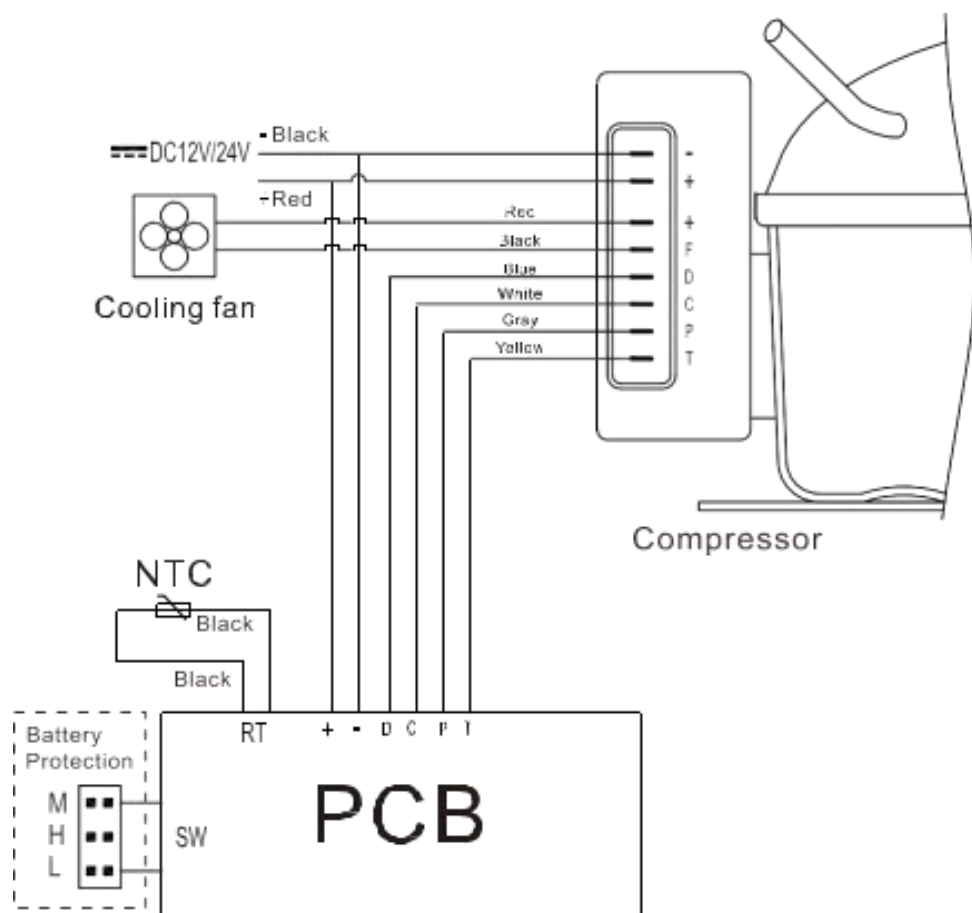

VEVOR[®]

TOUGH TOOLS, HALF PRICE

Technical Support and E-Warranty Certificate

<https://www.vevor.com/support>